

# LED UK

## Stark Mini Clear


The Stark Mini LED is a 117 diameter surface mounted downlight which uses CREE XP-E LED chip set, Macadam 3. The heatsink is constructed from die-cast aluminium complete with aluminium rolled-formed body and reflector. The base plate uses three fixing points with a twist and lock action to secure the luminaire on the ceiling. The bezel has a deep recess detail creating a glare friendly cut-off which is also an aesthetically pleasing architectural detail. The Stark Mini is available in 1020lm and 1275lm outputs.

- CREE XP-E LED
- Macadam 3
- Cast Aluminium
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span



### General

Dimensions	Ø117 x 115mm
Weight	0.4kg
Installation	Ceiling Surface Ceiling Suspended
Voltage	220-240Vac
Certification	CE, ROHS
Warranty	5 Years

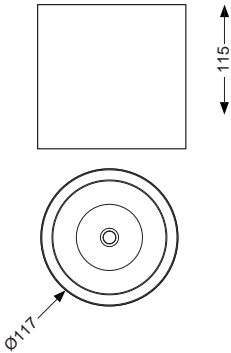

### Performance

Colour Rendering	Ra>82
Longevity	50,000 hours
System Power	12 W 15 W
Exit Lumens	1020lm 1275lm
Efficiency	85.0 lm/cW
Compliance	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

Stark Mini Clear

Available options

Wattage	12W - 1020lm, 15W - 1275lm
Colour	White, Special RAL Colour
Colour Temperature	3000K, 4000K
Lens	Clear
Beam Angle	60°
Mounting Option	Surface, Suspended
Dimming	Fixed Output, 1-10V Dimming (Remote Driver), Dali Dimming (Remote Driver), Mains Dimming (Remote Driver), Switch Dimming (Remote Driver)
Emergency	Not required, 3 Hour Facility (Remote Pack), 3 Hour Self Test (Remote Pack), 3 Hour Central Test (Remote Pack)

Product Code: STK-M