


# LED UK

## FLEXX Neon

Flexx Neon IP68 is a highly versatile LED linear fitting suitable for many varied application types including exterior architectural installation. As well as straight and extruded linear runs, the system can be installed in a flexible manner as it has a 30° bending tolerance. There is no need to use extrusion with FLEXX Neon but it is essential if using in an Architectural manner. All lengths are cut to required lengths and fitted with sealed IP68 end caps and live end connectors.

- IP68 rated
- 12 W/m
- 10m max. run length
- Range of IP68 connectors
- Straight Run Extrusion Available

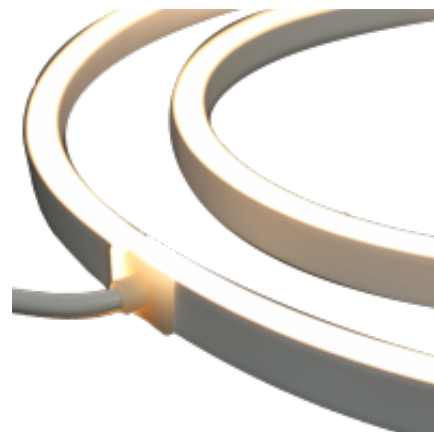

### General

Profile	21 x 11.5mm
Cutpoints	100mm
Max. Single Run	10m
Certification	CE, ROHS

### Performance

IP Rating	IP68
Colour Rendering	Ra>80
Longevity	50,000 hours
Voltage	24V DC

### Accessories

Mould Injected Front Connector	MIF-FLX
Mould Injected End Connector	MIE-FLX
Small Gap Installation	SGI-FLX
Multi Function Waterproof Connector	MFW-FLX
Male and Female Waterproof Connector	MWC-FLX
IP68 Front and End Connectors	IP68-F-FLX
	IP68-E-FLX
Aluminium Mounting Channel	AMC-FLX

# LEDUK

## FLEXX Neon

---

### Available options

Colour	3000K - 380 Lm/m, 4000K - 380 Lm/m, RGB, Red Static, Green Static, Blue Static
IP Rating	IP68
Dimming	Fixed Output, 1-10V Dimming, DALI Dimming

Product Code: FLX