

## Trend Spike


Trend Spike Architectural Spot Light is a surface mounted luminaire with an IP65 rating. The luminaire is constructed from Die Cast Aluminium and is available in varied wattages. Fitting is available in varied beam angles and LED colours. Fitting is supplied with an inground mounting spike and LED drivers are mounted integrally to the fitting body.

- IP65 Rated
- Instant on - no flicker
- Environmentally Friendly - No mercury or lead enters the environment
- No RF and electronic magnetic interference
- Over 50,000 hours life span
- Integral Mounted LED Driver



### General

<b>Dimensions</b>	90mm Diameter x 180mm Height
<b>Weight</b>	1.7 Kg
<b>Installation</b>	Spike Mounted
<b>Voltage</b>	120-277Vac
<b>Operating Temperature</b>	-30° + 55°C
<b>Certification</b>	CE, ROHS
<b>Warranty</b>	5 Years

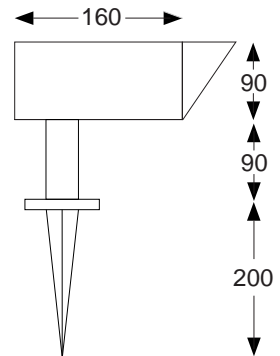

### Performance

<b>Colour Rendering</b>	Ra>82
<b>Longevity</b>	50,000 hours
<b>System Power</b>	15W 20W
<b>Exit Lumens</b>	1378 Lm 1838 Lm
<b>Beam Angles</b>	15°/24°/36°
<b>Efficiency</b>	91.91 l/cW
<b>Compliance</b>	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

### Available options

<b>Wattage</b>	15W, 20W
<b>Beam Angle</b>	15°, 24°, 36°
<b>Colour Temperature</b>	3000K, 4000K
<b>Dimming</b>	Fixed Output

**Product Code: TRD-SPK**