

## Union Max Projector

The Single Lens Projector is constructed from high grade cast aluminium finished with a zinc coating for interior and exterior use. The highly efficient Cree LED light source creates exit lumen packages ranging from 24,000 to 84,000lm.

- Cree LED chips
- 50,000hours
- 3000K, 4000K & 6500K
- DALI / 0-10Vdc dimming
- Photocell sensor system
- Built-in surge protection
- Built-in thermal protection
- Maintenance free
- Mercury free, No UV or IR
- Instant start and flicker free
- Patent multi-function design
- Up to 10 year warranty




### General

<b>Dimensions</b>	466 x 388 x 471mm
<b>Weight</b>	19.0 kg
<b>Certification</b>	SAA, TUV, CE, GS, CB, ERP
<b>Warranty</b>	Up to 10 Years



### Performance

<b>Operating Temperature</b>	-40°C - 60°C
<b>Colour Rendering</b>	Ra>80
<b>Longevity</b>	50,000 hours
<b>Compliance</b>	Building Regulations ETL (Energy Technology List) ECA (Enhanced Capital Allowance) SKA Rating

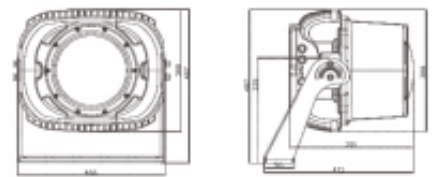

## Union Max Projector

---

### Available options

<b>Wattage</b>	300W, 400W, 500W, 600W, 700W
<b>Colour Temperature</b>	Warm White (3000K), Neutral White (4000K), Cool White (6000K)
<b>Beam Angle</b>	15°, 20°, 30°
<b>IP Rating</b>	IP67
<b>Mounting Option</b>	Pendent, Pole, Bracket
<b>Dimming</b>	Fixed Output, 1-10V Dimmable, DALI Dimmable
<b>Photocell</b>	Not Required, Microwave Sensor, Photocell
<b>Input</b>	110-480Vac
<b>Light Distribution</b>	No Beam Control, Horizontal Hood, Lens Guard, Horizontal Hood + Lens Guard

**Product Code: UNI**